

General Description



Parker cavity plugs can be used in any Integrated Hydraulic Circuit where one valve serves several machines and/or options. Two machines may have identical circuits except for one having a pressure reducing function, and the other not having this function. The machine that does not require this function can have the pressure reducing function replaced by a cavity plug; thereby utilizing a common body for both machines.

Specifications


Maximum Working Pressure - 350 Bar (5000 PSI)

Material - Steel

Symbols

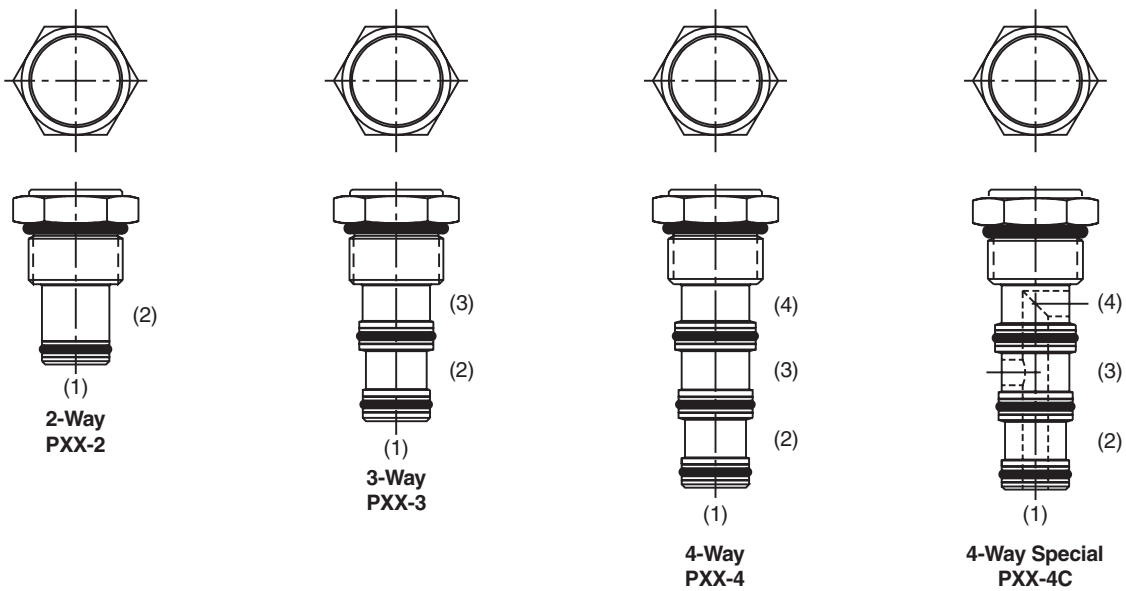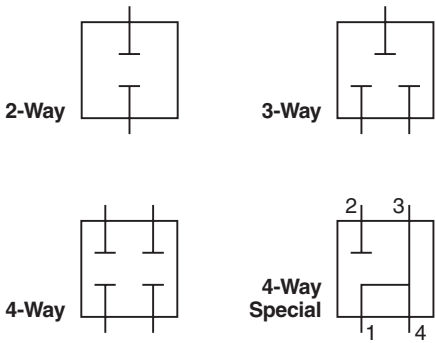

Ordering Information

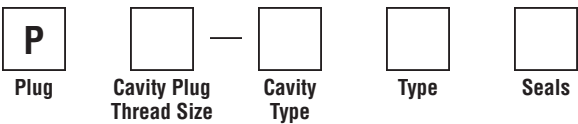

Code	Cavity Plug Thread Size
08	3/4 - 16
10	7/8 - 14
12	1-1/16 - 12
16	1-5/16 - 12

Consult Factory for Shaded Areas.

Code	Cavity Type
2	Two Way
3	Three Way
4	Four Way

Type									
Code	Two Way		Three Way			Four Way			
	1	2	1	2	3	1	2	3	4
Omit	C	C	C	C	C	C	C	C	C
A			O	O	C	O	O	O	C
B			O	C	O	O	O	C	O
C			C	O	O	O	C	O	O
D						*O	*O	*C	*C
E						C	O	O	C

C = Blocked O = Open  
\* Only Available In Sizes 08 and 10.  
Consult Factory for Shaded Areas.

Code	Seals
Omit	Nitrile
V	Fluorocarbon